

# TAURI<sup>TM</sup>

## Vaccine Verify



**TAURI-Vaccine-Verify** validates the vaccination status of visitors and customers who check into your business premises and venues. TAURI-Vaccine-Verify is the best instant results tool to check if your visitors have been vaccinated or not.

### PRODUCT HIGHLIGHTS

- Integrated with State of California Digital Covid Record and European Commission Digital Covid Certification
- Body temperature check
- 3 sizes available
- Vaccine verification



Body Temperature Check



Integrated with State of California Digital Covid 19 Record and EU Digital Covid Certification



Vaccine verification



3 sizes available  
10, 15 and 21 inch


TAURI™ vaccine verify

		GAD101-A Part#TAURIVV	NEB156 Part#TAURIVV	NEB215 Part#TAURIVV
<b>Screen size</b>		10"	15.6"	21.5"
<b>Panel info.</b>	<b>Resolution</b>	1280 x 800	1920 x 1080	
	<b>Brightness</b>	350 cd/m <sup>2</sup>	250 cd/m <sup>2</sup>	200 cd/m <sup>2</sup>
	<b>Contrast ratio</b>	800:1		1000:1
	<b>Aspect Ratio</b>	16:10		16:9
	<b>Active Display Area</b>	134.8 x 216.2mm	344.16 x 193.59 mm	476.06 x 267.786 mm
	<b>Viewing angle</b>	H:170°/ V:170°		H:178°/ V:178°
	<b>Touch Tech.</b>	5 point cap touch (6H semi-tempered glass)		10 point cap touch (reflective glass)
	<b>Hardware &amp; OS</b>	<b>CPU</b>	RK3288 Cortex A17, Quad core 1.8GHz	
	<b>RAM</b>	2GB DDR3		
	<b>ROM</b>	8GB eMMC Flash		
	<b>OS</b>	Android 7.1.2		
<b>Software</b>	<b>TAURI features</b>	Define temperature range for alert Adjust volume of alert sound OTA Feature Update Heat Map Generation Multi Language support Calibration Customize temperature result message Customize wear mask reminder message High temperature email notifications Face detection Optional facial recognition Access control via relay HDMI display output Dual monitor display Display signage Print results of scan Customize questionnaire		
<b>Video/ Image</b>	<b>Video format</b>	H.265, VP8, RV, WMV, AVS, H.263, MPEG4, HTML5, Flash 10		H.265, VP8, RV, WMV, AVS, H.263, MPEG4, Up to 4K x 2K decoding, HTML5, Flash 10
	<b>Audio format</b>	MP3/ WMA/ AAC etc.		
	<b>Image format</b>	JPEG, BMP, PNG		
<b>Audio</b>	<b>Speaker</b>	1W x 2	3W x 2	2W x 2
<b>Communication</b>	<b>Bluetooth</b>	EDR 4.2	EDR 4.2	EDR 4.2
	<b>RFID</b>	/		
	<b>Wi-Fi</b>	802.11 b/g/n/ac 2.4GHz and 5GHz		
	<b>Ethernet</b>	10/100 LAN		
<b>General information</b>	<b>Color</b>	Black		
	<b>I/O</b>	RJ45 x 1; USB x 1; SD slot x 1; Micro-USB x 1; 3.5mm audio x 1; Recover x 1. expandable 2 USB; HDMI	RJ45 x 1; USB x 2; SD slot x 1; Micro-USB x 1; 3.5mm audio x 1; Recover x 1; GPIO Support; HDMI	RJ45 x 1; USB x 3; SD slot x 1; Micro-USB x 1; 3.5mm audio x 1; HDMI Recover x 1; RS232 x 2; GPIO Support
	<b>AV capability</b>	Front Facing Camera 2 MP fixed focus		
	<b>Included in Box</b>	Tablet, Power Adaptor, Power cable		
	<b>Sensors</b>	G-sensor		
	<b>Consumption</b>	11W	15W	32W
	<b>Power input</b>	12V 2A		12V 2.2A
	<b>Operating Environment</b>	Operating: 32°F to 104°F (0°C to 40°C); Storage: -4°F to 122°F (-20°C to 50°C) Operating: 20%-80%; Storage: 10%-95%		
	<b>Certification</b>	CE, FCC, ROHS, MiC		
	<b>Language</b>	Multi language		
	<b>VESA</b>	VESA 75	VESA 100	VESA 100
<b>2D barcode sensor</b>	<b>Support standard</b>	Support QR Code, EAN-8, EAN-13, ISBN-10, ISBN-13, CODE39, CODE93, CODE128, UPC, ITF, Code Bar		
	<b>Scan distance</b>	0-10cm		
	<b>Scan direction</b>	360°		
	<b>Scan speed</b>	50ms		
	<b>Scan density</b>	≥7mil		
<b>Infrared temperature Sensor</b>	<b>Power input</b>	3.3 – 3.6V, 50mA, USB connect		
	<b>Temperature check distance</b>	0.5m – 1m		
	<b>Temperature check range</b>	30°C - 45°C		
	<b>Temperature check error</b>	±0.3°C		

## TAURI Stand and Mounts

	Small size	Medium size	Large size	Wall mount
SKU number	FIX-028	FIX-027	FIX-030	WM015012S
				
Compatible Devices	7, 10 & 15.6 inch	15.6 & 21.5 inch	10, 15.6 & 21.5 inch	10, 15.6 & 21.5 inch
Product weight	1.4kg	1.5kg	3.5kg	0.5kg
Dimension (product weight)	163 x 205 x 235mm	190 x 280 x 380 mm	320 x 260 x 465mm	120 x 150 x 10 mm
Dimension (Retail Packaging)	291 x 216 x 61mm	246 x 225 x 61mm	465 x 290 x 95mm	165x 135 x 26mm

Floor stand	
SKU number	FIX-031
Compatible Devices	7,10,15.6 & 21.5 inch
Product weight	9.5kg
Dimension (product)	1370 x 275 x 335 mm
Dimension (Retail Packaging includes two sets of floor stands)	2 sets of floor stand packaging. Three boxes in total. Box1: Stand body (1215 x 175 x 135 mm) Box2: Stand body (1215 x 175 x 135 mm) Box3: Stand base x2, Device mount x 2 (408 x 340 x 311 mm)

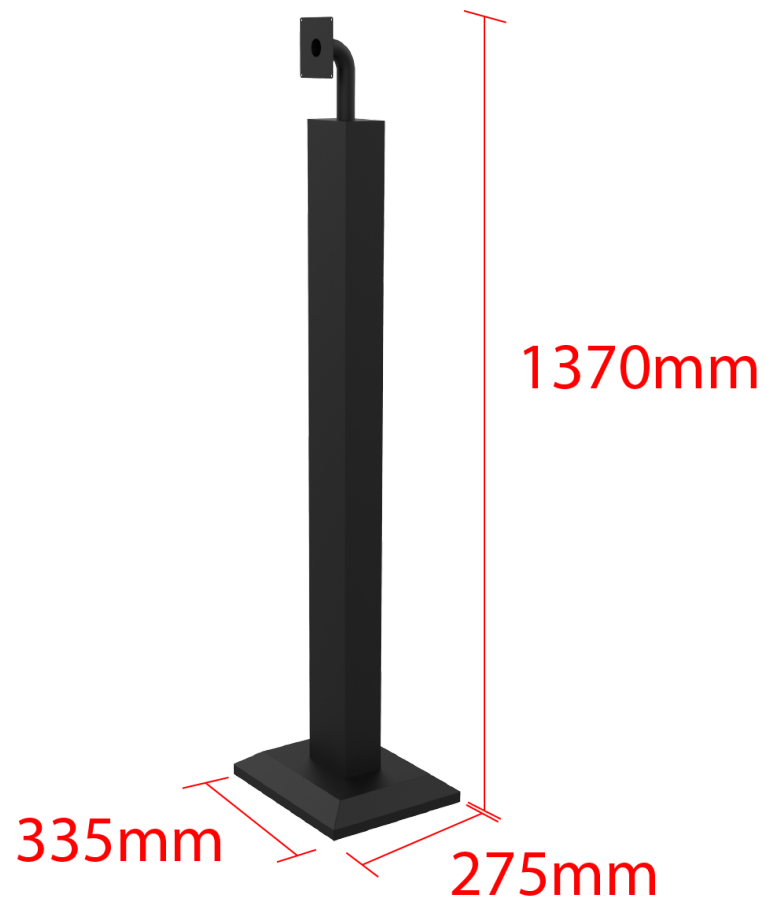

## CONTACT US

### New Zealand

**Representative Office**

07 Ta Ora Drive  
East Tamaki  
Auckland

**Phone**

AKL: +64 9 271 4000  
WLG: +64 4 499 3888

[sales@avw.co.nz](mailto:sales@avw.co.nz)

### Australia

**20/28 Barcoo Street,  
Roseville, NSW 2069  
Sydney, 2069**

**Phone**

NSW: +61 2 8213 0200  
VIC: +61 3 8691 5210  
QLD: +61 7 3607 3785  
WA: +61 8 8120 3203

[sales@avw.com.au](mailto:sales@avw.com.au)



To find out more about our extensive range of Glory Star solutions, go to [www.avw.co.nz](http://www.avw.co.nz) or call the office nearest you. For more information, please contact us at [sales@avw.co.nz](mailto:sales@avw.co.nz). AVW and Glory Star reserves the right to change or update, without notice, any information contained herein; to change, without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products.