JK Audio

ComPack

UNIVERSAL TELEPHONE AUDIO INTERFACE



CE

FEATURES

- Works with conventional Phone Lines
- Works with analog and digital PBX or ISDN phones
- Works with most cell phones
- XLR input (mic / line)
- 3.5 mm line input
- Transmit clip LED
- XLR phone mix output switches to intercom link
- 1/4" headphone jack
- Keypad lockout switch
- Battery test LED
- Runs 20 hours on one 9 volt battery

Pick up this handheld road tool to get audio in and out of analog phone lines, PBX systems, even cell phones. Perfect for Remote Broadcasts, IFB feeds, or interviews over any phone connection.

Analog Phones: Plug ComPack into an RJ-11 jack, go off-hook and dial, or answer an incoming call.

PBX Systems: Unplug the handset from any analog or digital PBX phone and plug the coily cord into ComPack. You can now send and receive audio through the PBX telephone set.

Cell Phones: Simply plug ComPack into the 2.5 mm headset jack of your wireless cell phone. Your phone will recognize ComPack as a headset, allowing you to send and receive audio through the phone.

The ComPack cell phone interface was designed to take advantage of the increasing number of wireless phones that accept third party headsets and earpiece headsets.

ComPack also functions as a simple telecom interface for your beltpack intercom system. This no-frills feature allows you to connect the 3 pin male XLR to your beltpack intercom group. This provides a full duplex, always-on connection to any telephone network.




JK Audio

ComPack

UNIVERSAL TELEPHONE AUDIO INTERFACE



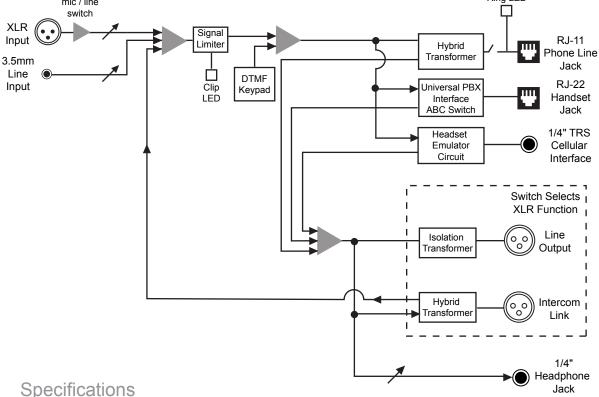

		Input		Output	
		Female XLR	1/8" (3.5mm)	Male XLR Phone Mix Mode	1/4" Stereo Heaphone Jack
	Impedance:	1 k ohms	20 k ohms	600 ohms	8 ohms
	Level:	15 mV RMS (-34 dBu) nom	250 mV RMS (-10 dBu) nom	45 mV RMS (-25 dBu) nom	500 mW

Mic/Line pad switch: Line = +6 dBu max Intercom Mode: bi-directional unbalanced

Phone Line:	RJ11C	Keypad:	DTMF
Isolation	1500 VAC	Sizo:	8" x 3" x 2.2" (20.3 x 7.6 x 5.6cm)
Ringer LED	0.9B REN	3126.	(20.3 x 7.6 x 5.6cm)
Power:	9 volt battery, AC power supply 120-240 VAC (included)	Weight:	1.5 lbs (680) grams