

13.3" 4K BROADCAST MONITOR

OLED SCREEN QUAD-SPLIT MULTIVIEW

- 3840×2160
- 100% DCI-P3
- Multiview
- 3G-SDI / HDMI 2.0

Model No.


A13



OLED 3840×2160

100000:1 CONTRAST RATIO

A cautious selected Ultra HD OLED screen panel has an even color distribution and a wide color space. Meanwhile, the OLED's contrast ratio reach up to 100,000:1, making details clearly visible.

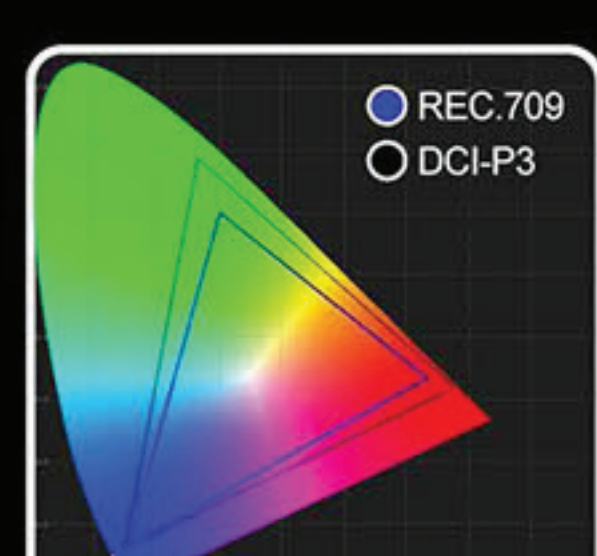

COLOR SPACE
100% Rec.709 & DCI-P3 color space.



COLOR CALIBRATION
Different calibrated color spaces such as Rec.709, NTSC, DCI-P3 can be selected.

Multi-Camera Setup

FEATURE WITH QUAD-SPLIT MULTIVIEW, PIP, PBP



The monitor is fitted with a multiview function that allows people to freely switch between display modes such as PBP, PIP and Quad-Split Multiview.

Rich Interfaces

HDMI / 3G-SDI / DP VIDEO SIGNALS



3G-SDI

Equipped with 3G-SDI input and loop output interfaces, which support up to 1080p 60Hz video signal.

HDMI

Equipped with 4× HDMI input interfaces, HDMI 1 supports to 2160p 60Hz video signals.

DP IN

Equipped with DP input interfaces, which support up to 2160p 60Hz video signal.



GIMBAL BRACKET




SUNSHADE

MOUNT WITH GEAR



DIFFERENT APPLICATION OPTIONS

Diverse applications can be achieved by equipping different accessories. The sunshade allows monitor to be exposed to outdoor sunlight and prevents the picture from being darkened due to reflections from the screen. The gimbal bracket offers added convenience through clever construction that allows for height adjustability.

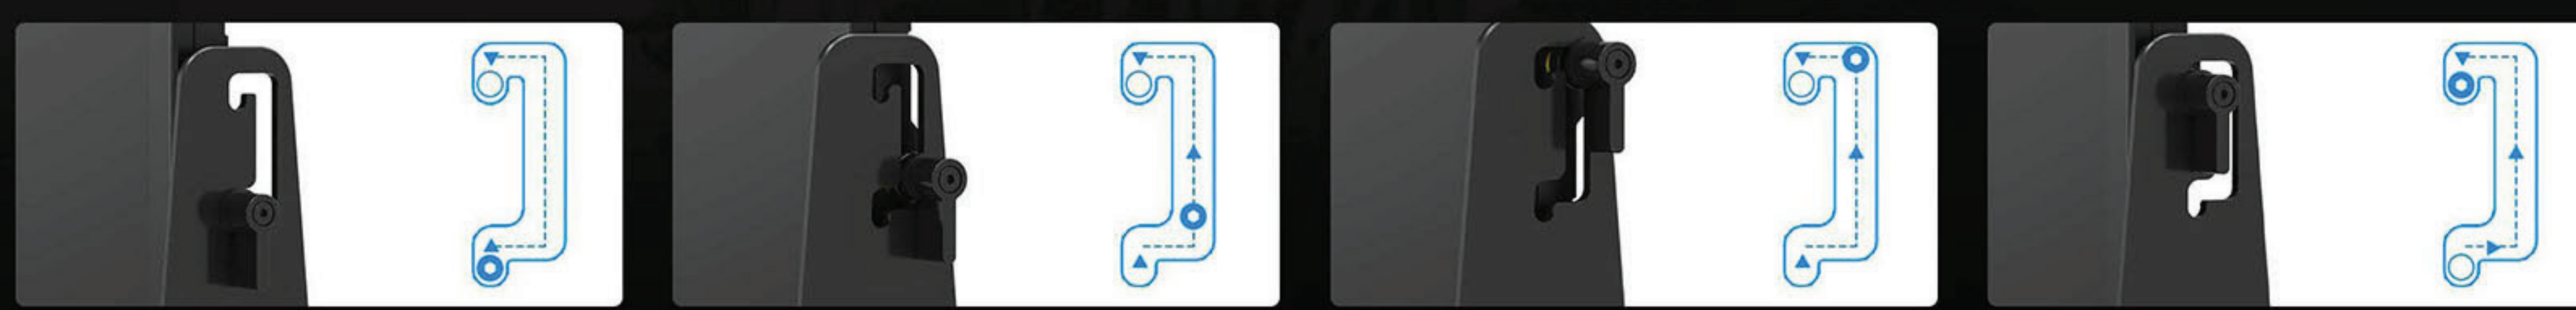

SPECIFICATIONS


DISPLAY	Panel	13.3" OLED
	Aspect Resolution	3840×2160
	Aspect Ratio	16:9
	Brightness	400 nits
	Contrast	100000:1
	Viewing Angle	170°/ 170°(H/V)
	Color Space	100% DCI-P3
	HDR Supported	PQ
INPUT	HDMI	1×HDMI 2.0, 3×HDMI 1.4b
	3G-SDI	1
	DP	1
OUTPUT	3G-SDI	1
SUPPORTED FORMATS	HDMI 2.0	2160p 24/25/30/50/60, 1080p 24/25/30/50/60, 1080i 50/60, 720p 50/60...
	HDMI 1.4b	2160p 24/25/30, 1080p 24/25/30/50/60, 1080i 50/60, 720p 50/60...
	3G-SDI	1080p 24/25/30/50/60, 1080pSF 24/25/30, 1080i 50/60, 720p 50/60...
	DP	2160p 24/25/30/50/60, 1080p 24/25/30/50/60, 1080i 50/60, 720p 50/60...
AUDIO IN/OUT	Speaker	2
	Ear Jack	3.5mm - 2ch 48kHz 24-bit
POWER	Input Voltage	DC 7-24V
	Power Consumption	≤20W (12V)
ENVIRONMENT	Operating Temperature	0°C-50°C
	Storage Temperature	-20°C-60°C
DIMENSION	Dimension(LWD)	320mm × 208mm × 26.5mm
	Weight	1.15kg

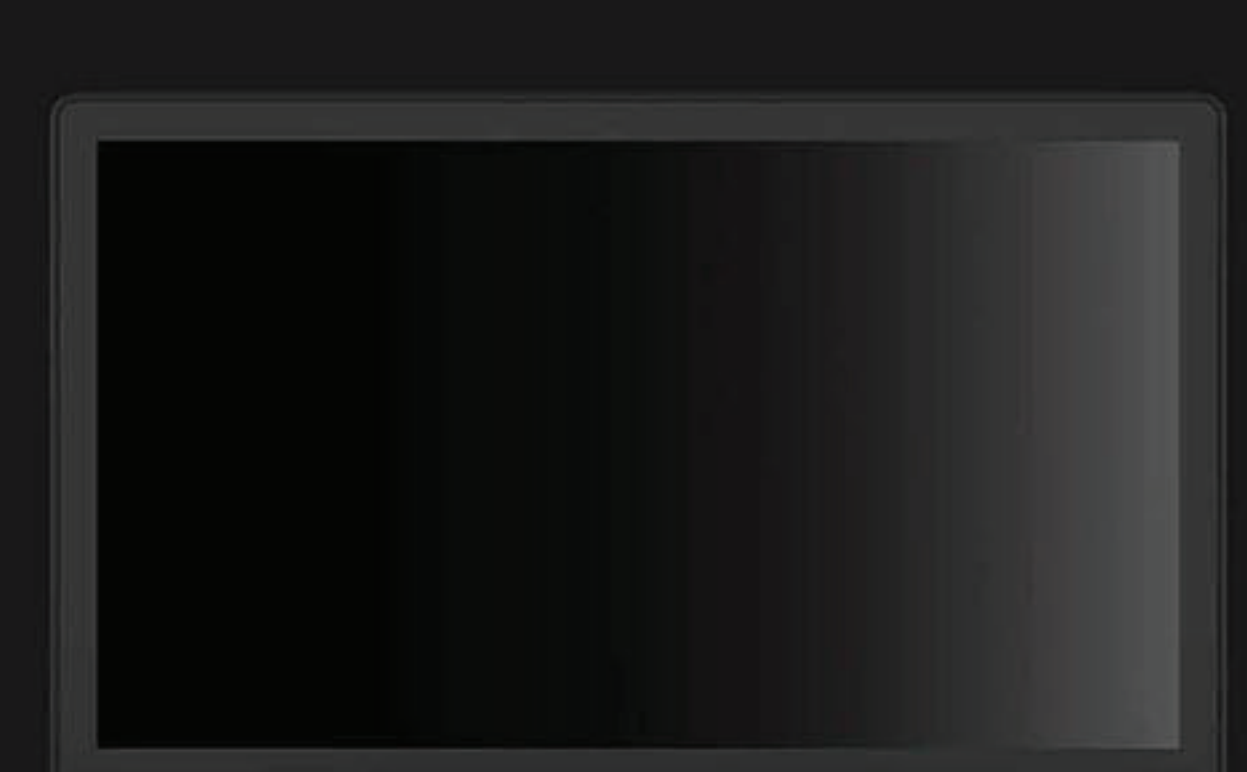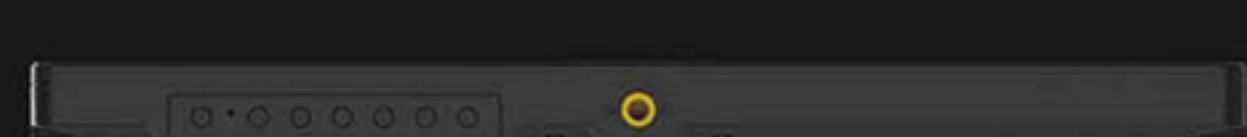

ACCESSORIES

STANDARD

OPTIONAL

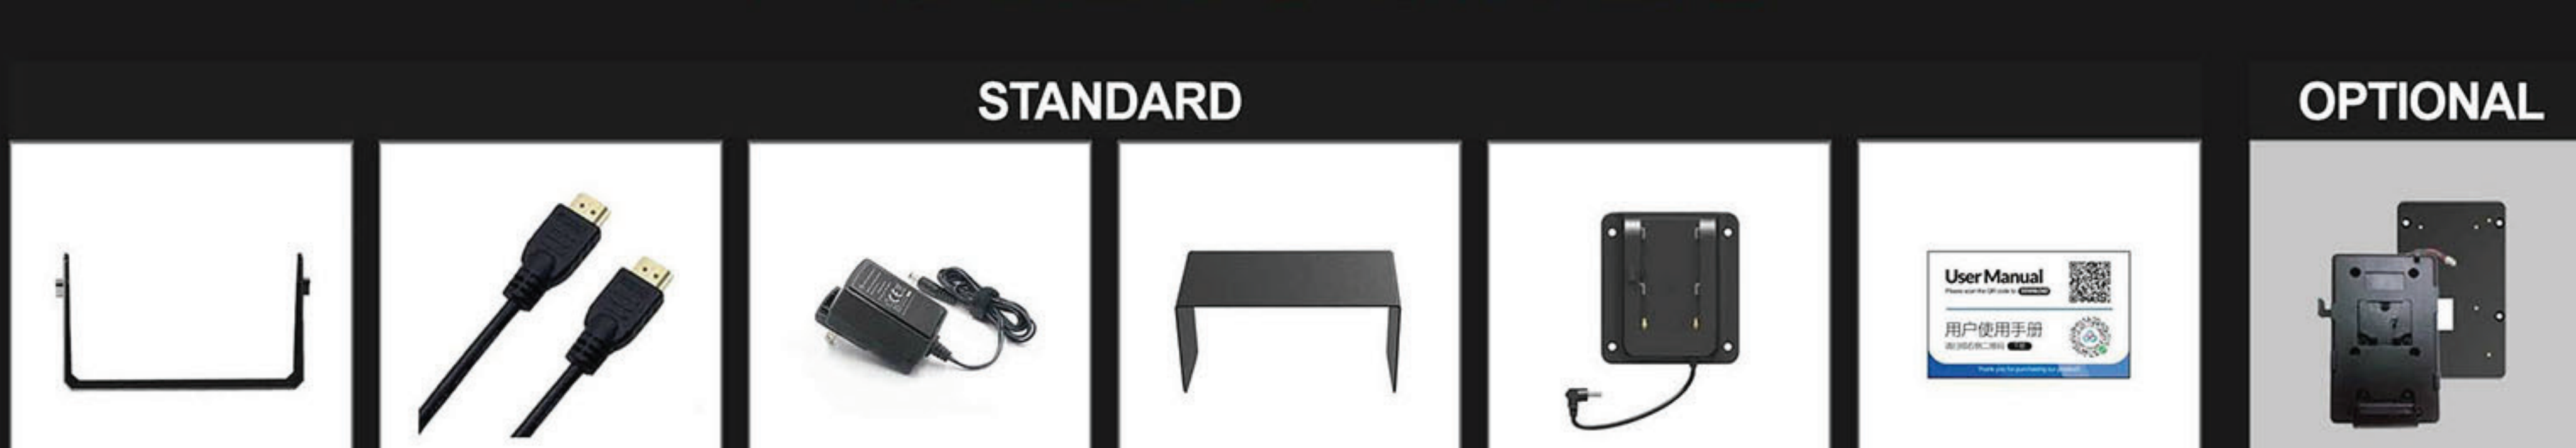

Gimbal Bracket

0.8M HDMI A-A Cable

12V 3A Power Adapter

Sunshade

VESA Battery Plate

E-User Manual

V-Lock Battery Plate